

Sample Examination Questions

Contents

Question number	Question type (section A or B)	Question focus
<u>1</u>	B	Power of a lens; formation of an image
<u>2</u>	B	Digitising an image; spectra of a signal
<u>3</u>	A	EM spectrum; resolution
<u>4</u>	B	Electrical behaviour and dissipation of power in electrical circuits
<u>5</u>	B	Simple electrical circuits; internal resistance
<u>6</u>	B	Series and parallel circuits
<u>7</u>	A	Signal spectrum
<u>8</u>	B	Polarisation of EM waves; signalling and imaging
<u>9</u>	B	Digitising a signal
<u>10</u>	A	Compressive stresses
<u>11</u>	B	Energy stored in a strained material
<u>12</u>	B	Types of fracture
<u>13</u>	A	Refraction
<u>14</u>	A	Digitising a signal
<u>15</u>	Synoptic Paper A	Storage of images
<u>16</u>	Synoptic Paper B	Electric charge and current

- 1 A photographic enlarger consists of a mains lamp, and two converging lenses as shown in Fig. 1.1.

A transparent negative is illuminated by light from a diffusing screen.

The transparent negative then acts as an optical object and its image is focused by the projecting lens onto the photographic paper below.

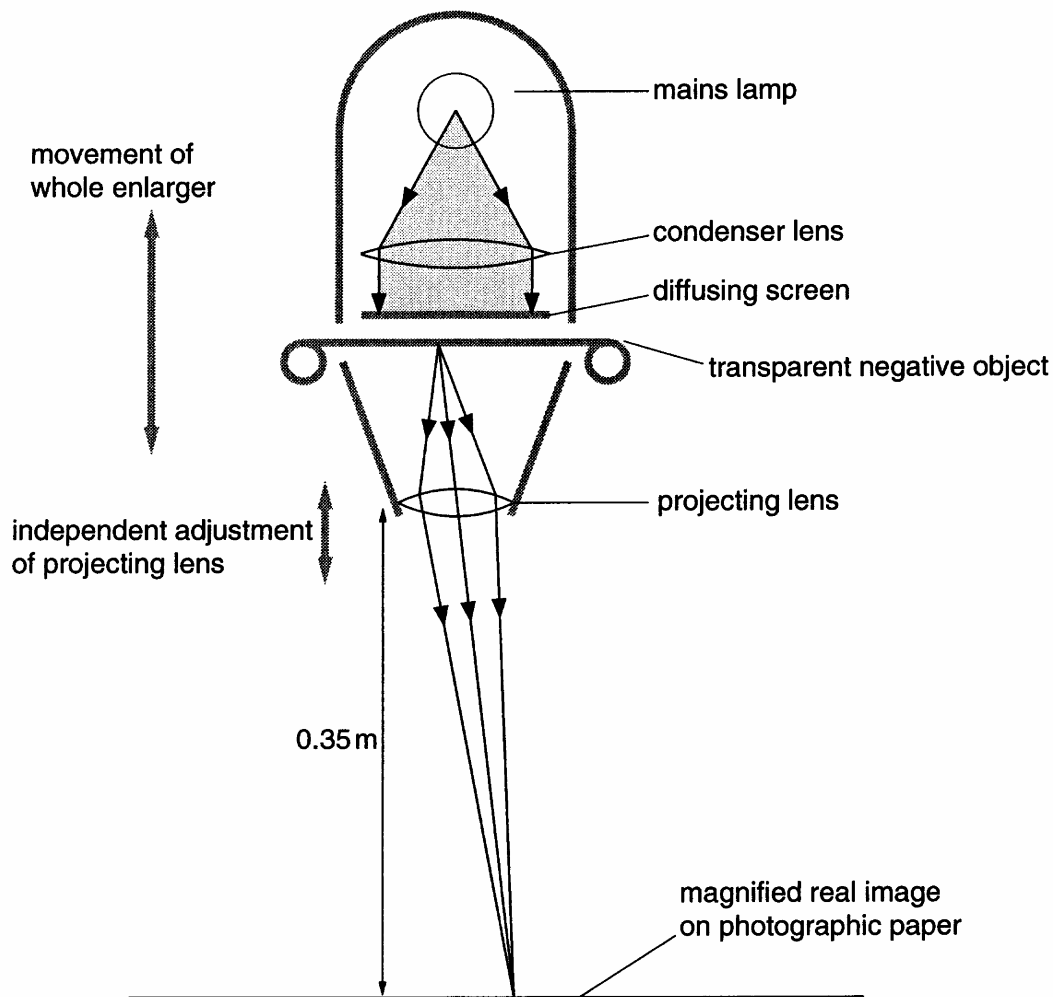


Fig. 1.1

Light from the mains lamp passes through the condenser lens illuminating the diffusing screen with a **parallel beam** of light.

- (a) (i) Describe and explain how the **curvature** of the wavefront changes as light passes from the mains lamp to the diffusing screen.

[2]

- (ii) The power of the condenser lens is +4.0 D.

Calculate the distance between the centres of condenser lens and lamp, so that **parallel** rays are produced. Explain your reasoning.

[3]

- (b) The transparent negative acts as an object for the projecting lens. The linear magnification required is $\times 6$ onto the photographic paper. This is achieved when the projecting lens is 0.35 m above the photographic paper.

- (i) Use the magnification to show that the distance between the transparent negative and the centre of the projecting lens is about 0.06 m.

distance = m [2]

- (ii) Using the information above, calculate the focal length f of the projecting lens.

focal length = m [3]

[Total: 10]

- 2** This question is about some aspects of mobile phone technology. A SIM card provides the memory for a mobile phone, and contains a small memory chip. This can be programmed to remember the user's personal telephone directory, with up to 100 names and numbers.

An example of a stored entry might be: **LAURENT 01396 813976**
Memory is reserved for names of up to ten letters and numbers of 12 digits.

- (a)** There are ten alternative decimal digits (0 to 9).

By working out the number of alternatives that can be coded by a 4-bit binary number, show that 4 bits is sufficient to code for each decimal digit in the number.

[2]

- (b)** Calculate the number of bits of information needed to store one hundred 12-digit numbers in memory.
Convert this to bytes.

bits required = bytes required = [2]

- (c)** Explain why more memory is needed to code for a letter from the English alphabet, than for a decimal digit.

[2]

- (d) (i)** A mobile phone samples sound 10 000 times per second.

Write down the highest sound frequency the mobile phone can transmit.

highest frequency = kHz [1]

- (ii)** The mobile phone reproduces speech satisfactorily, but the quality of music reproduction is poor.


Suggest **two** reasons for this.

- 1.
- 2.

[2]

- 3 This is an ultraviolet image of Saturn taken from the Hubble space telescope.

512 pixels

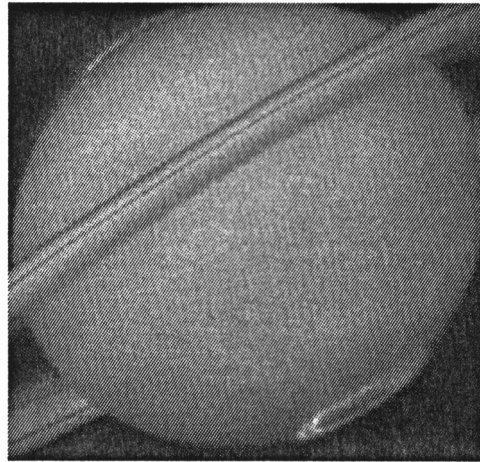

512 pixels

- (a) Suggest why ultraviolet images cannot be obtained by ground based telescopes.

[1]

Saturn has a diameter of 1.2×10^8 m, and the picture contains 512×512 pixels.

- (b) Estimate the resolution of the image, making your method clear.

[2]

- 4 This question is about aspects of a portable, flexible electrical extension cable, shown in cross-section in Fig. 4.1.

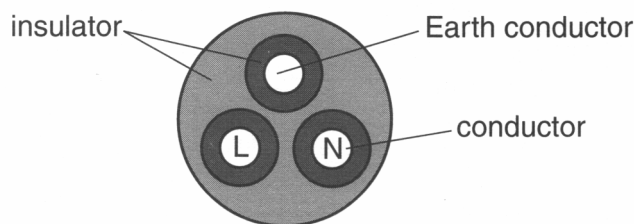


Fig. 4.1

- (a) Complete the table for the required properties of suitable materials for making the cable.

	conductor	insulator
electrical conductivity		very low
suitable material	copper	

[2]

- (b) The live **L** and neutral **N** conductors are connected in series with the load and the supply as shown in Fig. 4.2.

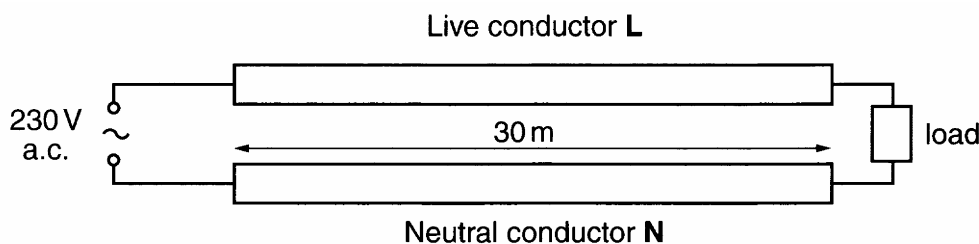


Fig. 4.2

- (i) The cable is 30 m long, so that in total 60 m of conductor in the cable are in series with the load.
 Each conductor has a cross-sectional area of $1.8 \times 10^{-6} \text{ m}^2$.
 Copper has a conductivity of $5.9 \times 10^7 \text{ S m}^{-1}$.

Show that the conductance of the cable is about 1.8 S.

[2]

- (ii) The cable has a maximum current rating of 13 A.

Calculate the voltage dropped across the total resistance of the 60 m of conductor when there is a current of 13 A.

voltage dropped = V [2]

- (iii) Show that the power dissipated in the cable under these conditions is of the order of 100 W.

[1]

- (iv) The cable is stored by being tightly wound on a reel. The makers recommend that if the cable is used coiled on its reel, the current in it should be significantly less than 13 A.

Use the data from (b) (iii) to suggest and explain a reason for this recommendation.

[2]

[Total: 9]

- 5 This question is about monitoring stress with the voltage output from a stressed crystal (as in a microphone). The crystal stress gauge is glued to the surface of a beam under slowly changing stress. A voltage appears across the crystal when it is stressed. The output voltage varies up to 200 mV, and the internal resistance r of the crystal is $5.0 \text{ M}\Omega$

- (a) (i) Calculate the maximum current the crystal stress gauge can produce.

maximum current = A [2]

The crystal stress gauge is connected in a circuit as shown in Fig. 5.1, with a measuring device of load resistance R equal to $5.0 \text{ M}\Omega$.

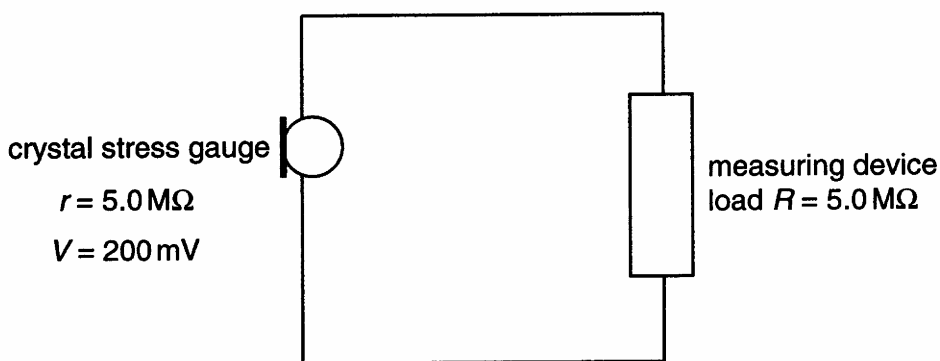


Fig. 5.1

- (ii) Show that the maximum current that can be drawn from the crystal in this arrangement is $2.0 \times 10^{-8} \text{ A}$.

[1]

- (iii) Calculate the value of the p.d. across the measuring device under this electrical load.

p.d. = V [2]

You are asked to choose an instrument to measure the output from the crystal, when measuring variations in stress.

The maximum output voltage from the crystal is 200 mV.

The instruments available are

instrument	full scale deflection	sensitivity	internal resistance	resolution
moving coil ammeter	300 mm	50 mm μA^{-1}	15 Ω	± 0.5 mm
cathode ray oscilloscope	10 cm	0.01 to 10 V cm^{-1}	25 M Ω	± 0.1 cm
digital voltmeter	20 V	0.01 V steps	2.0 M Ω	± 0.01 V

(b) (i) Which instrument would you choose?

[1]

(ii) Use the data in the table to explain your choice.

[2]

(iii) For the instrument you have chosen, calculate the output it would measure for a 200 mV signal from the crystal.

[2]

[Total: 10]

- 6 This question is about the demister of the rear view window of a motorcar. A conducting material is fused onto the glass surface, to make an electrical heater. There are 10 conducting tracks, as illustrated below.
- (a) On Fig. 6.1 draw a series connection of the conductors to the battery and on Fig. 6.2 draw a parallel connection to the battery.



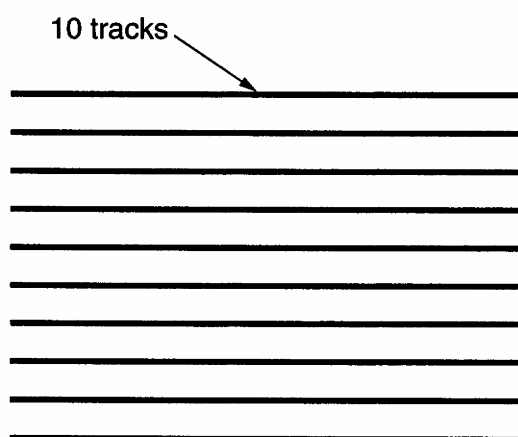
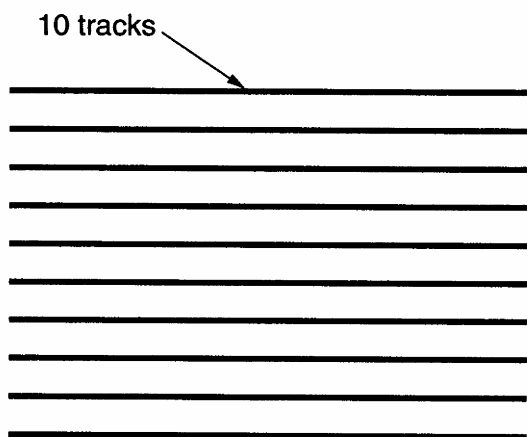


Fig. 6.1 (draw a series circuit)

Fig. 6.2 (draw a parallel circuit)

[1]

To demist effectively, each track in the heater needs to dissipate a power of 24 W. The battery operates at 12 V d.c. (ignore the effects of internal resistance).

- (b) Complete the table.

	series connection	parallel connection
p.d. across each track / V		
current in each track / A		
conductance of each track / S		

[5]

The material from which the tracks are made has a conductivity of $4.2 \times 10^5 \text{ S m}^{-1}$. The tracks are 1.0 m long and 0.20 mm thick, as shown in Fig. 6.3.

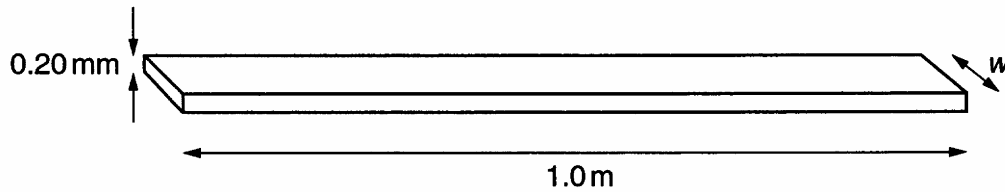


Fig. 6.3 (not to scale)

- (c) (i) Show that the width w of each of the parallel connected tracks needs to be about 2.0 mm to achieve a conductance of 0.17 S per track.


[3]

- (ii) Would you choose series or parallel connected tracks for a demister?

Give your reason.

[1]

7 A sound spectrograph, lasting about 4 s is shown below.

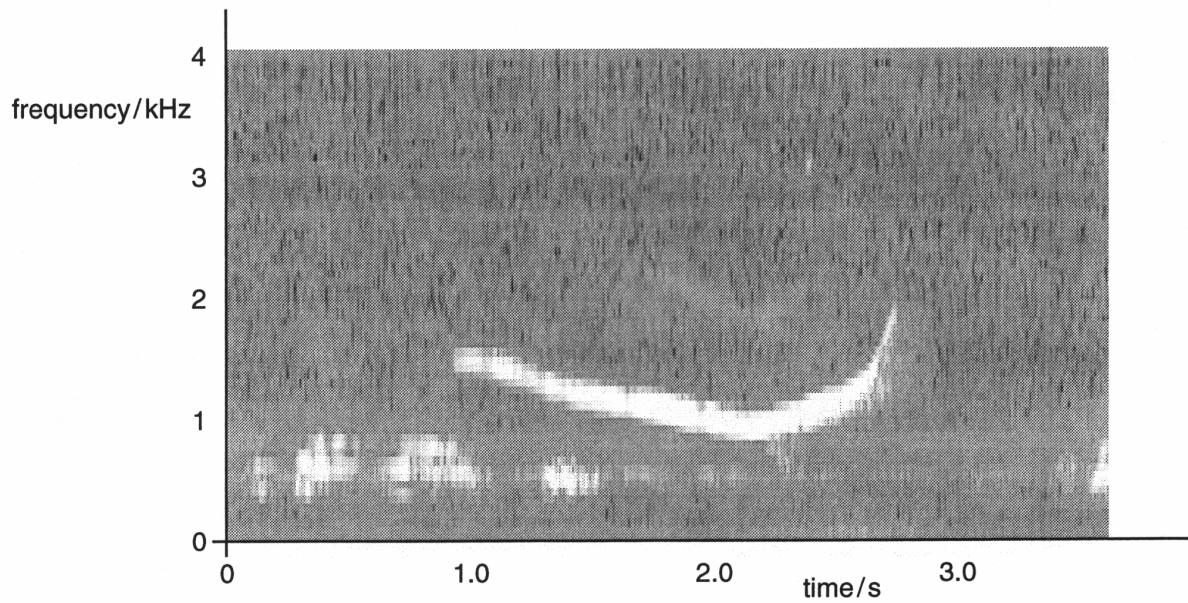

(a) Suggest **one** example where this type of display could be useful.

[1]

(b) The spectrograph shows some speech, and includes a whistle lasting from $t = 1.0$ to $t = 3.0$ seconds approximately.

Describe **two** features of the whistle, from the spectrograph data.

[2]

- 8 This question is about signalling and imaging in television.
 Fig. 8.1 shows a t.v. aerial being pointed towards the transmitter and receiving a plane polarised signal.

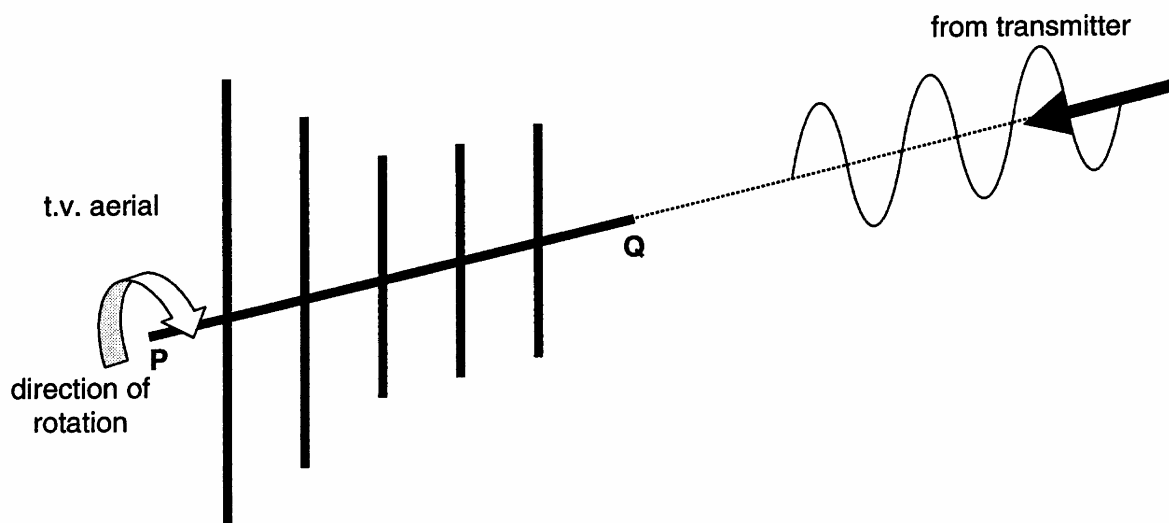


Fig. 8.1

- (a) The aerial is rotated about the axis **PQ**, starting from the position shown, where the received signal is a maximum.
 Complete the table to show the variation in the received signal, as the aerial is rotated 180° about the axis **PQ**.

angle of rotation	received signal
0°	maximum
90°	
180°	

[2]

- (b) Suggest an explanation for the variation you indicated in the table.

[2]

- (c) A digital t.v. transmission uses a carrier wavelength of 0.14 m.

- (i) Show that the frequency of the carrier waves is about 2.0 GHz.
 speed of light $c = 3.0 \times 10^8 \text{ m s}^{-1}$

[2]

- (ii) There is a total of about 2×10^6 pixels in the screen of a typical t.v. Each pixel requires one **byte** of information to code its intensity value. The screen is refreshed 25 times every second.

Show that the information transmission rate required in this system is $400 \times 10^6 \text{ bits s}^{-1}$.

[2]

- (iii) Fig. 8.2 shows the carrier wave being switched on and off, as bits 1 and 0 are being transmitted.

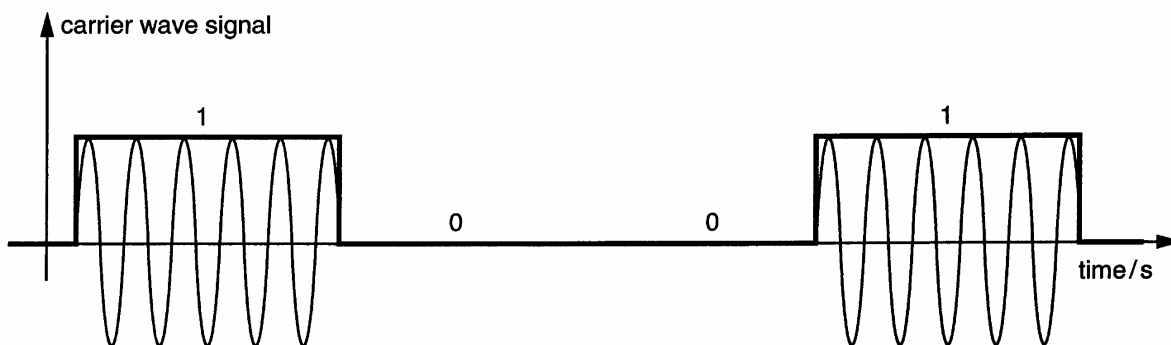


Fig. 8.2

Calculate the time to transmit one bit on this transmission system.

time..... s [2]

[Total: 10]

9 This question is about the conversion of signals from analogue to digital. Figure 9.1 shows 2.0 ms of a sampled sound waveform.

(a) State and explain one advantage and one disadvantage of a signal in digital rather than analogue form.

Advantage:

Disadvantage:

[4]

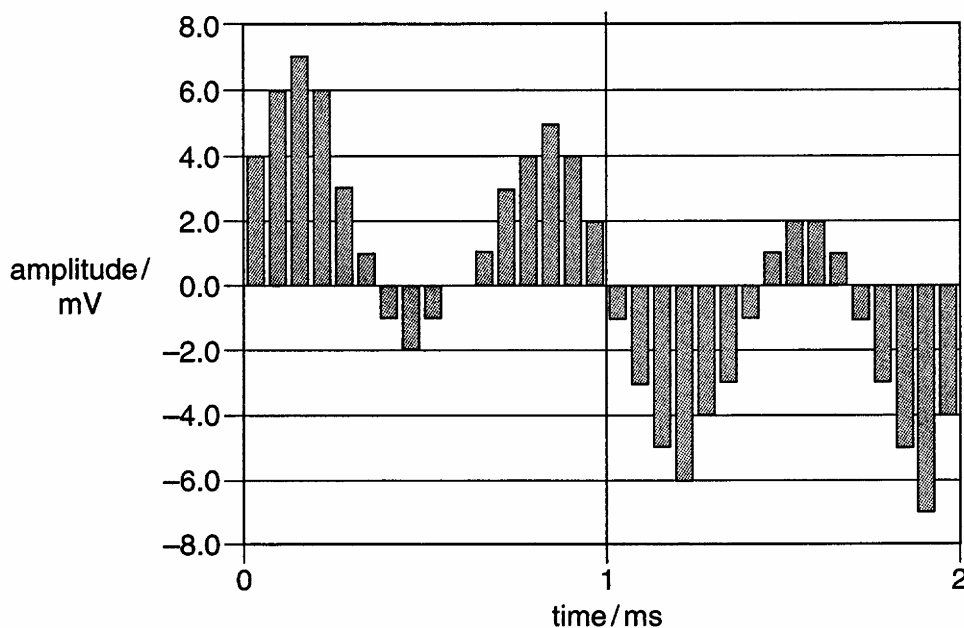


Fig. 9.1

(b) (i) State the number of different voltage levels used in this sampled waveform.

number of voltage levels used = [1]

(ii) State how many bits are needed to code for this number of levels, justifying your answer.

(iii) State the sampling frequency of the digital converter. [2]

sampling frequency = [1]

(iv) Calculate the information transmission rate in bits per second for this digitised signal.

information transmission rate = bit s⁻¹ [2]

10 A kitchen freezer of total mass 300 kg (including contents) rests on a vinyl plastic floor covering.

- (a) Calculate the weight of the freezer and its contents
 $g = 9.8 \text{ N kg}^{-1}$

weight = N [1]

- (b) The feet of the freezer have a **total** cross-sectional area of $8.0 \times 10^{-4} \text{ m}^2$.
The vinyl plastic floor covering has a compressive yield stress of 3.5 MPa.

Show that the feet of the freezer can cause permanent damage to the vinyl plastic floor covering.

[2]

11 This question is about steel wires in tension.

Guitar strings can be made from tensile steel wire. A sample of steel wire is tested in the laboratory. Fig. 11.1 shows the force–extension graph obtained when the wire is stretched.

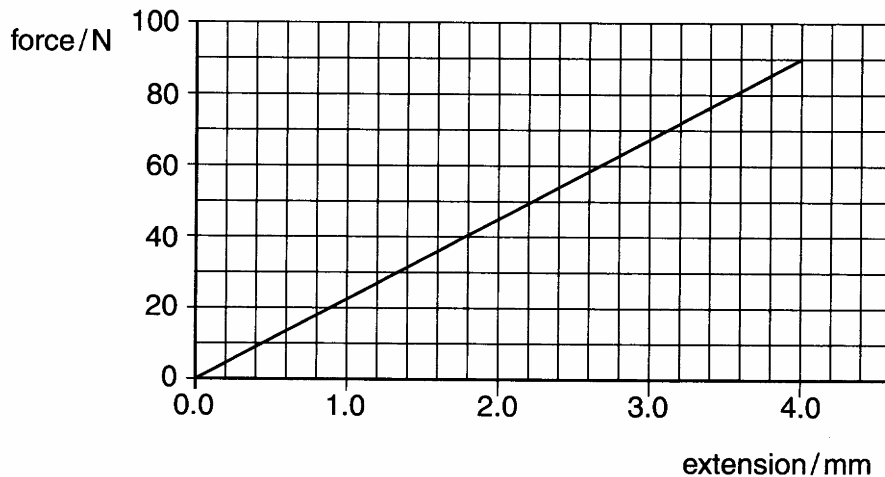


Fig. 11.1

(a) Describe how the extension varies as the force is increased.

[1]

(b) The area under the force against extension graph equals the energy stored in the stretched wire.

(i) Calculate the energy stored when the force in the wire is 90 N.

energy = unit [3]

- (ii) This sample of steel wire had an original length of 2.0 m and cross-sectional area of $2.5 \times 10^{-7} \text{ m}^2$.

Use these facts and information from the graph, to calculate the Young modulus of the steel.

Young modulus = N m^{-2} [5]

- (c) The test is repeated using another sample of the same wire, but of only **half** the original length.

- (i) **Sketch on the axes of Fig. 11.1** the force–extension graph you would expect for this wire, as the force is increased to 90 N.

[1]

- (ii) How does the Young modulus for this wire compare with that of the sample used in the first test?
Explain your reasoning.

[2]

12 The images **A** and **B** show two different kinds of fracture.

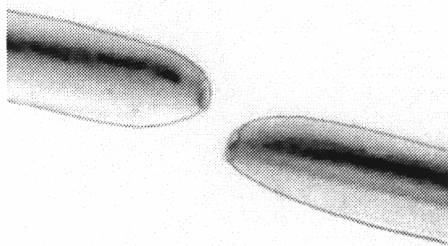


image **A**

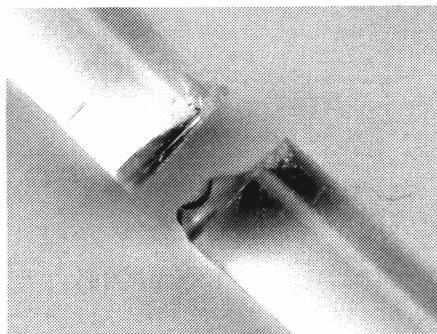


image **B**

(a) State the two kinds of fracture, for each suggesting a material that fractures in this way.

A shows fracture,
 a possible material is

B shows fracture,
 a possible material is

[4]

(b) The two kinds of fracture have different mechanisms, which depend on the atomic structure of the material.

For each of the materials you have suggested **describe in terms of its atomic structure** how the material deforms and fractures.

Material **A**

[3]

Material **B**

[3]

[Total: 10]

13 A ray of light is refracted at an air–water boundary as shown below.

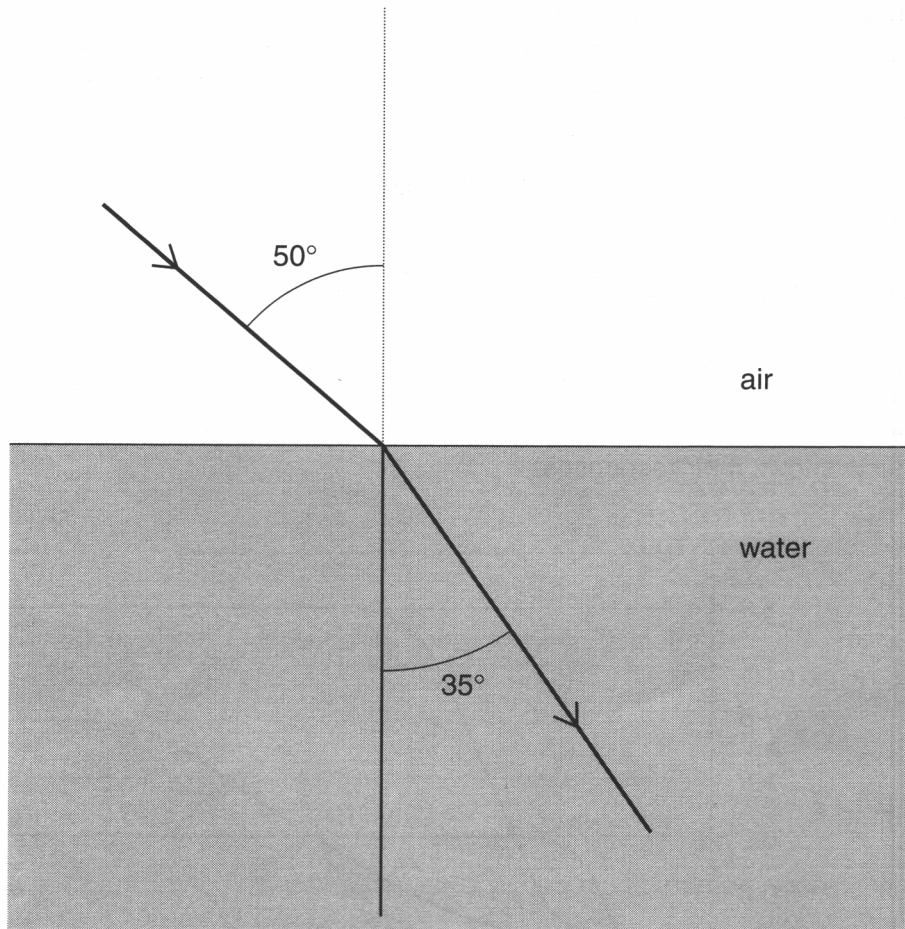


Fig. 13.1

Use the data from the diagram to calculate the refractive index for water.

[3]

- 14 Read the paragraph below about a telephone signalling system before answering the questions about it.

The frequency range of sound transmitted by a telephone system ranges from 300 Hz to about 3400 Hz. When the signal is digitised, digital samples are taken 8000 times per second. Each sample of the signal is transmitted using 16 bits of information.

- (a) State the meaning of the term **frequency**.

[1]

- (b) Explain what is meant by **digital samples**.

[2]

- (c) State the meaning of the term **bit of information**.

[1]

- 15 Fig. 15.1 shows a very simple way of coding each letter in the word 'My' into a 12 x 8 block of pixels. Each pixel can be either black or white.

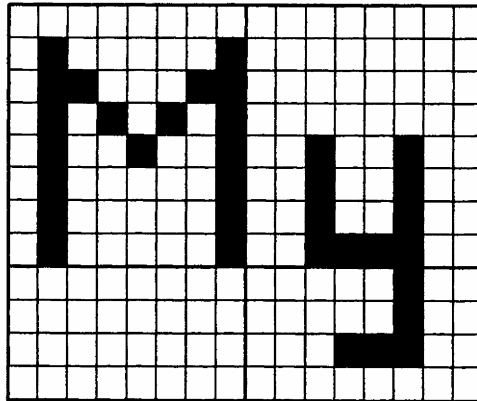


Fig. 15.1

- (a) (i) Explain why each pixel needs only a single binary digit (bit) to code its intensity.

[1]

- (ii) The letter 'M' is 2.6 mm tall. Show that each pixel on the page is about 4×10^{-4} m in size.

[1]

- (iii) A page measures about 300 mm tall x 200 mm wide.
Calculate the amount of information, in bits, in a page of A4 covered with text.

[2]

- (b) Fig. 15.2 shows an attempt to code each letter in the word 'My' into a 6 x 4 block of 24 pixels.

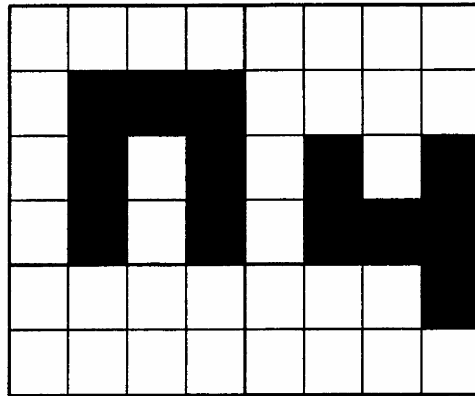


Fig. 15.2

Explain why 24 pixels is not enough to encode each letter in this way.

[1]

16 This question is about electric cars.

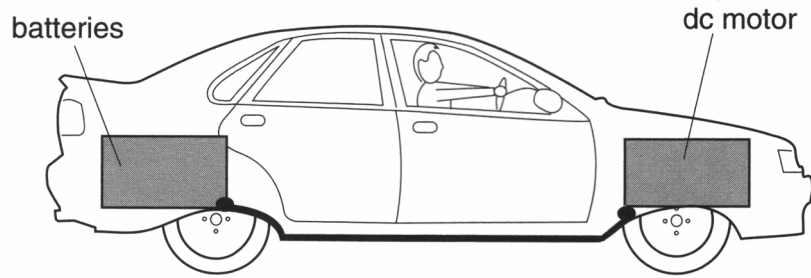


Fig. 16.1

(a) The power source for an electric car consists of a rechargeable set of 10 lead-acid batteries, each with an emf of 24 V. The capacity of one such battery is 80 ampere-hours – it could deliver a current of 80 A for an hour.

(i) Show that when one battery, initially fully charged, is completely discharged, a charge of about 300 000 C has flowed.

(ii) The car has 10 such batteries in parallel, each fully charged. Show that the batteries can deliver a current of 200 A for 4 hours.

(iii) Calculate the power delivered by the ten batteries in parallel when delivering a current of 200 A.

power..... W

(iv) Explain why the answer to part (iii) is likely to be substantially greater than the rate at which the car gains kinetic energy.

[8]